



Eco Jetwash


Machine details - april 2009

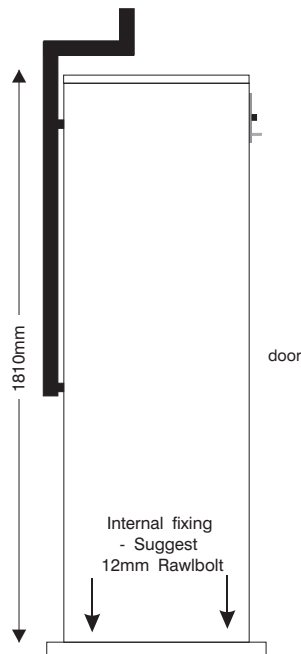

NOTE: Base Plinth MUST be flat and level

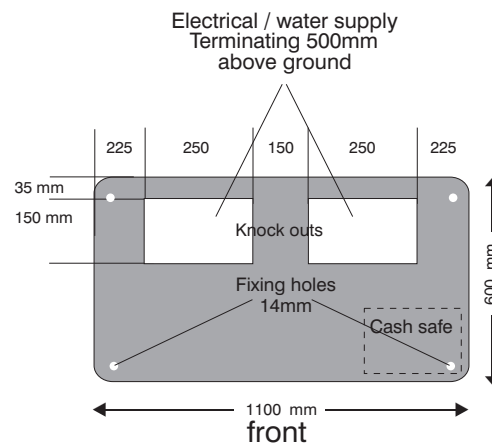


Suggested Plinth details

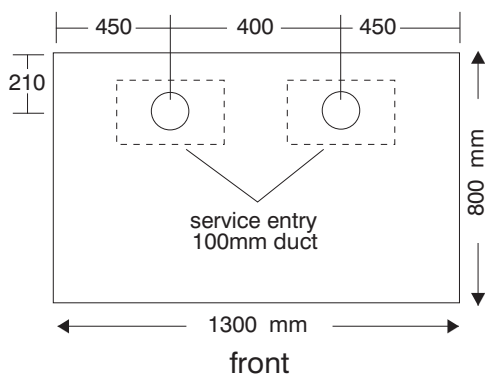


Concrete grade C35 -
sulphate class 1-
min cement content 325 kg/m³ -
max water/cement ratio 0.55

Water - normal mains fed, min flow
25L/min through 15/22mm poly pipe.

Electric - Eco
240 volt 1 phase + E 40 amp
or - 415 volt 3 phase +N +E 20 amp

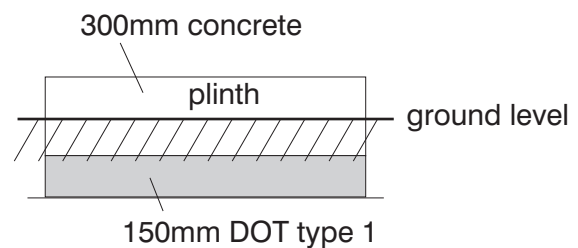


Wash pad details

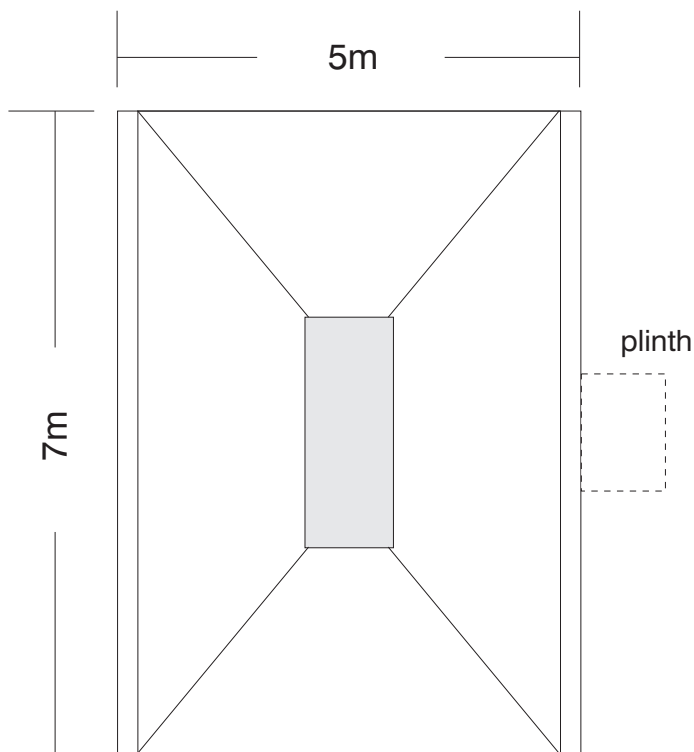

Concrete mix grade C35 -
Sulphate class 1 -
min cement content 325 kg/m³ -
max water / cement ratio 0.55 -

All fill materials to be placed in layers not exceeding 150mm, each layer to be compacted.

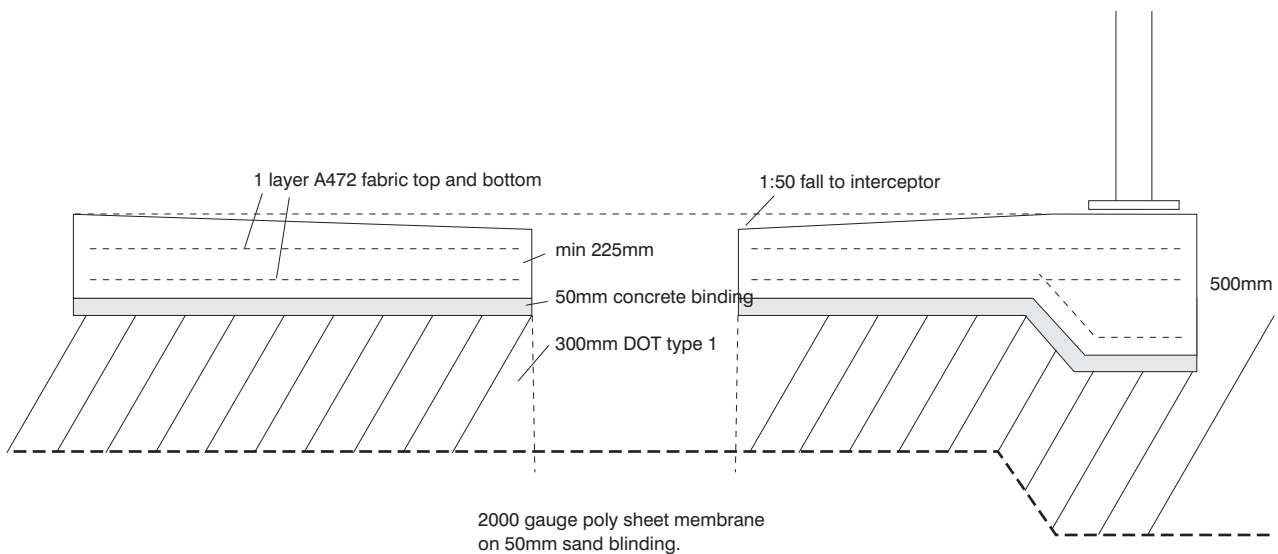

Suggested standard pad

Suggested pad with additional edge for screen fixing

NOTE - These drawings are examples only - refer to local building regulations for approved construction method